



RayNeo



Worldwide Olympic Partner

# X3 Pro User Manual

# Package Contents

RayNeo AR Glasses \*1

Portable Glasses Case \*1

Custom Nose Pads \*2  
(Small size pre-installed)

USB-C Data Cable \*1


Glasses Cleaning Cloth \*1

Prescription Lens  
Template \*1

Quick Start Guide \*1

User Manual \*1

# Product Overview

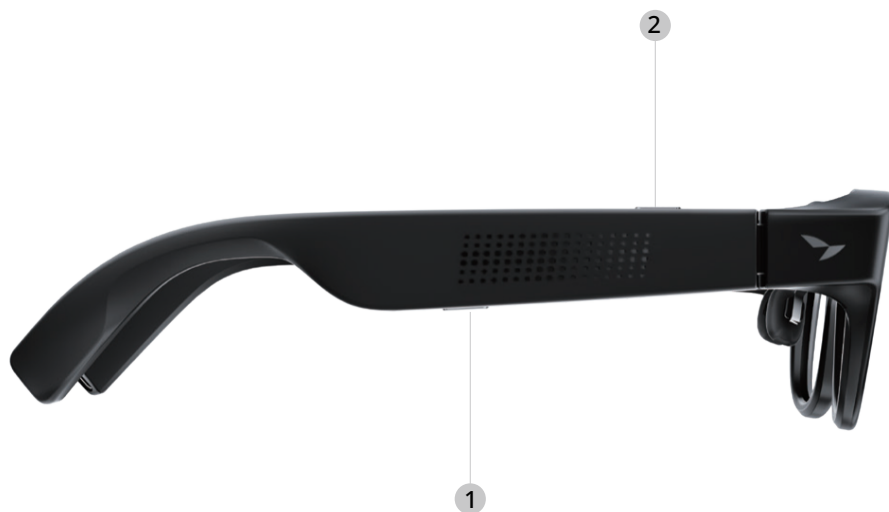

## 1 Power Button

When device is off, long press for 4s to power it on.

When device is on, long press for 4s to toggle shutdown/standby options.

When device is on, long press for 12s to force shutdown.

## 2 Shortcut Button

Default: Start voice recording.  
(Customizable via RayNeo App)



## 1 Wearing Detection

Screen automatically turns off in non-wearing mode to save energy. Wake by tapping the power button or wearing it.

## 2 Dual Front Cameras

Supports photo taking, video recording, and recognition.

## 5 Camera Indicator

Solid light when taking photos and blinking light during video recording.

## 6 Speaker

## 7 Microphone



\*For detailed instructions, please refer to the RayNeo App.

## 8 Left/Right Touch Control Area

### Right Touch Control Area

Swipe up/down/forward/backward: Navigate and switch

Tap: Confirm; Double-tap: Back; Long press: Wake up the control center

### Left Touch Control Area

Swipe forward/backward: Adjust volume; Swipe up/down:

Previous/Next track

Double-tap: Play/Pause music; Long press: Wake up AI Assistant

## 9 Power Indicator

Charging: Red for 8s; Fully charged: Green for 8s

Charging error: Continuous red blinking

## 10 USB-C Port

USB 2.0 data transfer supported.

Supports simultaneous charging and use.

## 11 Nose Pads

Attach and adjust the nose pads for optimal comfort and full view.

An alternative set of nose pads is included in the package for better fit.

# Specifications

Operating System	Android
RAM	4G
ROM	32G
Optical Engine	RayNeo Self-Developed Micro LED Firefly Optical Engine (FOV 30°)
Display Solution	Binocular full-color display
Maximum Brightness	2000 nits
Refresh Rate	60Hz
Battery Capacity	245mAh
Charging Specifications	5V / 1A
IP Rating	IPX2
Weight	76±1g
Dimensions (Open)	153.06*45.65*168.85mm